



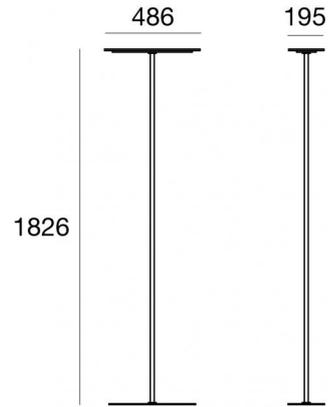

Floor Lamp | 220-240 V  
2 topLED 24 W DC - 28 W AC | CRI 80  
7496



Technical data	
Designer	Linea Light
Construction year	2015
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	24 W
Source lumens	3148 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	4,70 m
Electric socket	Type F+E
Resin potting	No
Type of light emission	Single emission
Net weight	11.8 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PMMA
Colour	white
Processing	Satin finishing

Finishing mounting frame	
Material	Iron
Colour	Embossed white RAL 9003
Processing	Coating



Floor Lamp | 220-240 V | 2 topLED 24 W DC - 28 W AC | CRI 80 | Base 7496

Single emission floor lamp for indoor application. The warm white LED light source with a general lighting light distribution is composed of 2 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3148 lm, with a 131.2 lm/W nominal luminous efficacy.

The diffuser is made of pmma with a satin finishing treatment; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 11.8 kg.

The total absorbed power is 27.8 W. The power supply cable is included and features a 4,70 m length.

The device features protection class I and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains 2 light sources of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	68 %
Source lumens	3148 lm
Delivered lumens	2149 lm
Consumption	28 W
Luminaire efficacy	76 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

### LED Life / Failure Ratio

L70 B20 C0 72500h

### OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	100°

